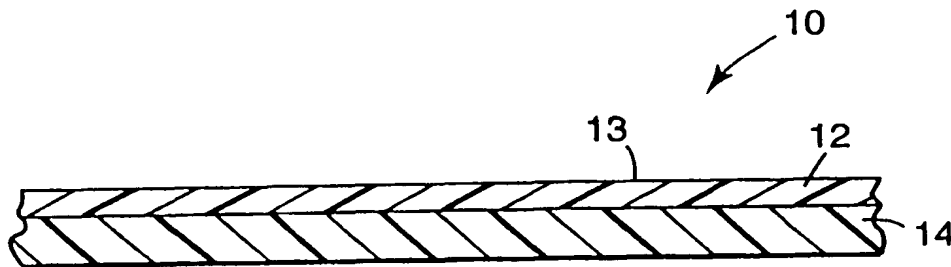


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B41M 5/00, G03G 7/00	A1	(11) International Publication Number: WO 00/01536 (43) International Publication Date: 13 January 2000 (13.01.00)
<p>(21) International Application Number: PCT/US99.03424</p> <p>(22) International Filing Date: 17 February 1999 (17.02.99)</p> <p>(30) Priority Data: 09/109,471 2 July 1998 (02.07.98) US</p> <p>(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).</p> <p>(72) Inventors: EMSLANDER, Jeffrey, O.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). HAAK, Christopher, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).</p> <p>(74) Agents: HORNICKEL, John, H. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: IMAGE RECEPTOR MEDIUM</p> <div data-bbox="373 1190 1318 1455" data-label="Image">  </div> <p>(57) Abstract</p> <p>An image receptor medium including an image reception layer having two major opposing surfaces. The image reception layer comprises a polymer comprising at least two monoethylenically unsaturated monomeric units, wherein one monomeric unit comprises a substituted alkene where each branch comprises from 0 to about 8 carbon atoms and wherein one other monomeric unit comprises a (meth)acrylic acid ester of a nontertiary alkyl alcohol in which the alkyl group contains from 1 to about 12 carbon atoms and can include heteroatoms in the alkyl chain and in which the alcohol can be linear, branched, or cyclic in nature and an efficacious amount of a free-radical scavenger. Alternatively, the image receptor medium includes a substrate layer comprising a polymer substrate layer having two major opposing surfaces and an image reception layer on a first major surface of the substrate layer. The image reception layer has an outer surface for receiving images, and comprises a polymer identified above. Either embodiment of the image receptor medium may further include an optional prime layer, an optional adhesive layer, and an optional inkjet layer.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Image Receptor Medium

Field of Invention

This invention relates to films useful as image receptor media for a
5 variety of imaging materials such as inks and toners.

Background of the Invention

Advertising and promotional displays often include graphic images
10 appearing on structural surfaces such as truck sides and awnings, or free-hanging
as banners. To prepare the display, an image may be formed on an adhesive-
backed image receptor medium, sometimes referred to as a graphic marking film,
which is then adhered to the desired substrate. Alternatively, the image may be
formed first on a temporary carrier, or image transfer medium, and transferred to
15 the image receptor medium. The image receptor medium usually includes a base
material with an additional receptor layer overlying it. The base material is
typically a plasticized vinyl film, although paper may also be used.

Although the graphic display may be intended for a long term
installation of 5 years or more, it is often a relatively short term (3 months to 1
20 year) outdoor installation. In the case of a short term display, the image receptor
medium is desirably a low cost, weather resistant, durable graphic marking film
having good printability and adhesion of inks and/or toners that is easily applied to
and removed from a surface. The vinyl base films currently used in graphic
marking films are generally too costly for a short term application, and present
25 problems with plasticizer migration, plasticizer staining and adhesive anchorage.
In addition, the chemical nature of the vinyl may present problems. For instance,
the chlorinated composition of vinyl may lead to environmental difficulties related
to vinyl disposal and use in applications having a risk of fire, due to hazardous
decomposition products, and the cadmium found in stabilizers used in most vinyl
30 formulations is restricted or prohibited in many countries. Paper-based media are
not sufficiently durable or weather resistant and tear easily when removed.
Polyolefin base films are low cost and contain no plasticizer but do not provide

good ink/toner adhesion. The application of the receptor layer over the base film usually requires an additional process step, thus adding cost to the manufacturing process.

Images can be created by one of several known methods, such as
5 electrography, screen printing, ink jet printing, and thermal mass transfer. Electrography involves passing a substrate, normally a dielectric material, through an electrographic printing device, one type of which is an electrostatic printer. In the printer, the substrate is addressed with static electric charges (e.g., as from a stylus) to form a latent image which is then developed with suitable toners. This
10 technique is especially suitable for producing large scale images for use on posters and signs.

At the conclusion of the electrographic process where the toned image has been developed on the dielectric substrate, the printed substrate can be enclosed between two layers of clear vinyl plastic film and used directly in an
15 outdoor application, such as a sign. Because the typical dielectric substrates are paper-based, however, they frequently lack the weather resistance required for outdoor signs. More durable substrates such as polyvinylchloride (PVC) and polyvinylacetate (PVA) films are difficult to image directly because of their electrical and mechanical properties.

20 To produce large signs that are suitable for outdoor display, the toned image electrographically deposited on a dielectric substrate can be transferred to a more weather resistant image receptor medium. The dielectric substrate is then known as an image transfer medium. This technique is discussed in U.S. Patent No. 5,262,259. Image transfer may also be practiced with images
25 created by a variety of other known techniques such as knife coating, roll coating, rotogravure coating, screen printing, and the like.

Transfer of the image from an image transfer medium to an image receptor medium typically requires the application of pressure and heat through, for example, lamination in a heated pressure roll system (hot roll lamination). This
30 type of image transfer system is described in U.S. Patent No. 5,114,520.

Images may also be created directly on a weatherable, durable image receptor medium using such techniques as screen printing and inkjet printing.

The inkjet printing process is now well known. Recently, wide format printers have become commercially available, making feasible the printing of large format articles such as posters, signs and banners. Inkjet printers are relatively inexpensive as compared with many other hardcopy output devices, such as electrostatic printers. Generally, thermal inkjet inks are wholly or partially water-based, whereas piezo inkjet inks can be solventless or solvent-based. Inkjet images may be printed on plain paper or on a suitable image receptor medium that has been treated or coated to improve its inkjet receptor properties. For example, it is known to apply an additional layer of material to an image receptor medium to improve the receptivity to and adhesion of inkjet inks. The materials commonly found in such an inkjet reception layer do not generally adhere well to many image receptor media base films, such as vinyl or polyester.

Print shops or graphic arts facilities that operate more than one type of printing process must stock a different image receptor medium for each process. Because of this, the inventory of receptor media can be large and expensive.

20 Summary of the Invention

There is a need for a low-cost, durable, weather resistant image receptor medium that can be used with a variety of inks and toners and will accept a transferred image via hot roll lamination at rates faster than what is currently possible.

25 The present invention solves the problems in the art with a film for use as an image receptor medium with a variety of printing and image transfer processes, and a variety of imaging materials such as inks and toners. The image receptor medium accepts toned images from an electrographically-printed image transfer medium using hot roll lamination at faster transfer rates than current media
30 and can be made of lower-cost materials.

In one aspect, the image receptor medium includes an image reception layer having two major opposing surfaces. The image reception layer comprises a polymer comprising at least two monoethylenically unsaturated monomeric units, wherein one monomeric unit comprises a substituted alkene where each branch comprises from 0 to about 8 carbon atoms and wherein one other monomeric unit comprises a (meth)acrylic acid ester of a nontertiary alkyl alcohol in which the alkyl group contains from 1 to about 12 carbon atoms and can include heteroatoms in the alkyl chain and in which the alcohol can be linear, branched, or cyclic in nature. Preferably, but optionally, the image reception layer includes an efficacious amount of a free-radical scavenger such as a hindered amine light stabilizer compound ("HALS" compound). The image reception layer provides properties of image receptivity to the image receptor medium. "Image receptivity" means that an image formed on or applied to the image receptor medium adheres completely or nearly completely after being subjected to a tape snap test in which 3M SCOTCH™ Tape No. 610 (commercially available from 3M Company, St. Paul, MN, USA) is firmly applied to the image and then removed with a rapid jerking motion. A prime layer is optionally included on a first major surface of the image reception layer. In this case, the second major surface of the image reception layer is an outer surface for receiving images.

In another aspect, the image receptor medium includes a polymer substrate layer having two major surfaces and an image reception layer on one major surface of the substrate layer. The image reception layer has an outer surface for receiving images and comprises a polymer comprising at least two monoethylenically unsaturated monomeric units, wherein one monomeric unit comprises a substituted alkene where each branch comprises from 0 to about 8 carbon atoms and wherein one other monomeric unit comprises a (meth)acrylic acid ester of a nontertiary alkyl alcohol in which the alkyl group contains from 1 to about 12 carbon atoms and can include heteroatoms in the alkyl chain and in which the alcohol can be linear, branched, or cyclic in nature.. The image reception layer preferably comprises at least 60% by weight of this polymer.

The image receptor medium can further include an optional prime layer on the major surface of the substrate layer opposite the image reception layer for promoting a strong bond between the substrate layer and an optional adhesive layer. The adhesive layer, preferably comprising a pressure sensitive adhesive, makes the multilayered film useful as a graphic marking film. The prime layer may also by itself serve as an adhesive layer. The image receptor medium can also further include an optional inkjet layer overlying the outer surface of the image reception layer for promoting the printability and receptivity of inkjet inks on the image receptor medium. The inkjet layer preferably comprises at least one top coat layer of one composition and at least one bottom coat layer of a second composition. The bottom coat layer contains dispersed particles of a size that causes protrusions from the surface of the top coat layer.

In the case where the image receptor medium includes a substrate layer, the image receptor medium can advantageously combine the best properties of several resins in the various layers while minimizing the use of the most expensive resins, leading to a higher value and lower cost image receptor medium. For example, the substrate layer is made with resins of generally low cost that can be chosen to provide specifically desired physical properties to the multilayered film. These properties may include dimensional stability, tear resistance, ability to withstand ultra-violet light (UV) used for curing inks that are used for forming images, conformability, elastomeric properties, die cuttability, stiffness and heat resistance.

The image receptor medium can be made of only nonhalogenated polymers, meaning that certain regulatory limitations are avoided in the disposal of waste materials (pertaining for example to polyvinyl chloride (PVC)). The image receptor medium exhibits image receptivity with a wide variety of printing materials such as screenprint inks, electrographic liquid and dry toners, thermal mass transfer materials, and inkjet inks (if the optional inkjet layer is present).

The image receptor medium need not contain plasticizers in any of its layers, thereby avoiding problems associated with plasticizer migration and plasticizer staining. The image receptor medium is especially useful as a graphic

marking film or banner film for relatively short-term advertising and promotional displays, both indoors and outdoors.

In another aspect, the invention provides a method of making an image receptor medium that involves providing at least two charges, each charge comprising at least one film-forming resin; coextruding the charges to form a multilayered coextrudate, wherein each layer of said coextrudate corresponds to one of the charges; and biaxially stretching the coextrudate to form a multilayered film comprising a nonplasticized polymer substrate layer having two opposing major surfaces; and an image reception layer on a first major surface of the substrate layer. The image reception layer has an outer surface for image reception and comprises the polymer as described above.

In another aspect, the invention provides several methods of providing an image on an image receptor medium. In all of the methods, the image receptor medium includes a nonplasticized substrate layer and an image reception layer comprising the polymer as described previously. A first method involves forming an image on an image transfer medium via electrography and transferring the image on to the image receptor medium. Other methods involve screen printing the image on the image receptor medium, thermal inkjet printing the image on the image receptor medium (wherein the image receptor medium also includes an inkjet layer as described above), and forming the image by thermal mass transfer on the image receptor medium.

Embodiments of the invention are described in connection with the following drawings.

Brief Description of the Drawing

Figure 1 is a schematic cross-sectional view illustrating an embodiment of the image receptor medium of this invention including an image reception layer and a substrate layer.

Figure 2 is a schematic cross-sectional view illustrating the image receptor medium of this invention including the layers shown in Figure 1 and an optional prime layer.

Figure 3 is a schematic cross-sectional view illustrating the image receptor medium of this invention including the layers shown in Figure 1, an optional prime layer and an optional inkjet layer.

5

Embodiments of the Invention

In one embodiment, the image receptor medium of this invention comprises a single image reception layer having two major surfaces. In another embodiment, as shown in Figure 1, the image receptor medium 10 comprises a substrate layer 14 having two major surfaces and an image reception layer 12 overlying and in contact with one surface of the substrate layer as illustrated in Figure 1. Image reception layer 12 has an outer surface 13 for receiving images.

Image Reception Layer

Image reception layer 12 comprises a polymer comprising at least two monoethylenically unsaturated monomeric units, wherein one monomeric unit comprises a substituted alkene where each branch comprises from 0 to about 8 carbon atoms and wherein one other monomeric unit comprises a (meth)acrylic acid ester of a nontertiary alkyl alcohol in which the alkyl group contains from 1 to about 12 carbon atoms and can include heteroatoms in the alkyl chain and in which the alcohol can be linear, branched, or cyclic in nature.

Nonlimiting examples of the first monomeric units include ethylene, propylene, butene, isobutylene, hexene, octene, and the like. Nonlimiting examples of the second monomeric units include methyl(meth)acrylate, ethyl(meth)acrylate, butyl(meth)acrylate, 2-ethylhexyl acrylate, ethoxyethyl acrylate, hexyl acrylate, and the like.

Of these polymers, ethylene methyl acrylates (EMAc) and ethylene ethyl acrylates (EEAc) are preferred because of their commercial availability. The polymer can be a random or block copolymer

Preferably, the number of carbon atoms ranges from 2 to about 4 for the first monomeric unit and from 4 to about 8 for the second monomeric unit

although the number of carbon atoms can be the same or different, and a mixture of different carbon length monomers can be used. Alternatively, a physical blend of polymeric resins may be used to produce a suitable image receptor layer.

5 The preferred commercially available acrylate polymers are typically used in the extrusion coating and laminating industries.

The quantity of polymers of the present invention in the image reception layer is preferably maximized within the limits of performance requirements of the image receptor medium. Routine efforts could be needed to optimize this quantity, although a typical formulation for most embodiments of the invention includes at least 60% and up to 100%, and preferably about 90% by weight of the polymers in the image receptor layer. The optimum quantity will depend upon the desired application and the targeted cost for the image receptor medium. The performance of the polymers of the present invention may be affected by other additives in the image reception layer.

15 The polymers of the present invention in the image reception layer provides image receptivity to a wide variety of imaging materials used in electrography, screen printing, thermal mass transfer or other printing processes. The polymers of the present invention are preferably capable of being extruded or coextruded into a substantially two-dimensional sheet and bonding without delamination to an adjacent substrate layer when the layers are coextruded or laminated. Alternatively, the polymers may be in the form of a dispersion capable of being coated onto a substrate layer by a method such as roll coating.

25 In the case where an image is transferred to the image receptor medium having both an image reception layer and a substrate layer from an image transfer medium by a method such as hot roll lamination, the image reception layer preferably remains fully attached to the substrate layer and shows minimal tendency to adhere to non-imaged portions of the image transfer medium.

The image reception layer may also contain other components such as pigments, fillers, ultraviolet (UV) stabilizing agents, antiblocking agents, antistatic agents, and carrier resins for additives such as pigments, all of which are

familiar to those skilled in the art. These additives are preferably chosen so as not to interfere with image receptivity.

A preferred additive to the image reception layer is a free-radical scavenger present in an amount from about 0.05% to about 1.5% and preferably from about 0.2 to about 0.8 weight percent of the total composition of the image receptor layer. Nonlimiting examples of the scavenger include hindered amine light stabilizer (HALS) compounds, hydroxylamines, sterically hindered phenols, and the like. Preferably, the free-radical scavenger is regenerating such as existing with the HALS compounds.

While it is known to those skilled in the art that HALS compounds can be included in formulations to assist in minimizing the effects of UV light and to provide increased durability, the art has also recognized that such HALS compounds interfere with imaging because such HALS compounds migrate to the imaging surface of the film. Those skilled in the art view the use of HALS as a detriment to image quality, to be tolerated for the benefit of increased durability. The present invention has found that addition of free-radical scavenger unexpectedly provides both durability protection and excellent imaging.

Unexpectedly, the use of a free-radical scavenger combines with polymers of the present invention in the image reception layer to provide increased adhesion of screenprint inks. This increased adhesion is unexpected because, as stated above, stabilizer materials are commonly known to migrate to the surface of a film and interfere with the adhesion of surface coatings such as inks. Especially significant and unexpected is the increased adhesion of UV curing ink systems after the film has been exposed several times to intense UV ink curing radiation as commonly occurs with UV screenprinting. With many current graphic films, a problem occurs when multiple colors are printed with UV curing inks onto a graphic marking film. As each color is printed, the graphic is passed under a bank of high intensity UV lights to cure the most recently applied ink. After several passes it becomes difficult for the UV ink to bond to the film in the unimaged areas and poor ink adhesion results. There are several ways to increase ink adhesion after this occurs but all require extra processing steps and the associated increased

costs all of which are undesirable. A film which maintains ink adhesion after multiple passes through a UV ink curing oven is desirable because it would lead to fewer processing steps and lower costs. In addition, some graphic fabricators would be allowed to increase the number of colors used in their graphics due to the lower cost of printing many colors without the additional processing steps required if the film is sensitive to multipass UV exposure.

If image reception layer 12 is used with a substrate layer 14, image reception layer 12 is relatively thin as compared to substrate layer 14, and preferably has a thickness in the range from 2.5 to 127 microns (0.1 to 5 mils). If image reception layer 12 is not associated with a substrate layer 14, then image reception layer 12 may need to be thicker than the above-described range to provide sufficient durability and dimensional stability for the intended application. A thicker image reception layer can increase the overall cost of the image receptor medium.

Optional Substrate Layer

In one embodiment, a substrate layer 14 is included in the image receptor medium, for example to reduce the cost and/or enhance the physical properties of the medium. The substrate layer is most commonly white and opaque for graphic display applications, but could also be transparent, translucent, or colored opaque. Substrate layer 14 can comprise any polymer having desirable physical properties for the intended application. Properties of flexibility or stiffness, durability, tear resistance, conformability to non-uniform surfaces, die cuttability, weatherability, heat resistance and elasticity are examples. For example, a graphic marking film used in short term outdoor promotional displays typically can withstand outdoor conditions for a period in the range from about 3 months to about one year or more and exhibits tear resistance and durability for easy application and removal.

The material for the substrate layer is preferably a resin capable of being extruded or coextruded into a substantially two-dimensional film. Examples of suitable materials include polyester, polyolefin, polyamide, polycarbonate,

polyurethane, polystyrene, acrylic, and polyvinyl chloride. Preferably, the substrate layer comprises a nonplasticized polymer to avoid difficulties with plasticizer migration and staining in the image receptor medium. Most preferably, the substrate layer comprises a polyolefin that is a propylene-ethylene copolymer containing about 6 weight % ethylene.

The substrate layer may also contain other components such as pigments, fillers, ultraviolet stabilizing agents, slip agents, antiblock agents, antistatic agents, and processing aids familiar to those skilled in the art. The substrate layer is commonly white opaque, but may also be transparent, colored opaque, or translucent.

A typical thickness of the substrate layer 14 is in the range from 12.7 to 305 microns (0.5 mil to 12 mils). However, the thickness can be outside this range providing the resulting image receptor medium is not too thick to feed into the printer or image transfer device of choice. A useful thickness is generally determined based on the requirements of the desired application.

Optional Prime Layer

As illustrated in Figure 2, optional prime layer 16 is located on the surface of substrate layer 14 opposite image reception layer 12. In the case where the image receptor medium does not include a substrate layer (not shown), the prime layer is located on the surface of the image reception layer 12 opposite the outer surface 13. The prime layer serves to increase the bond strength between the substrate layer and an adhesive layer 17 if the bond strength is not sufficiently high without the prime layer. The presence of an adhesive layer makes the image receptor medium useful as a graphic marking film. Although it is preferable to use a pressure sensitive adhesive, any adhesive that is particularly suited to the substrate layer and to the selected application can be used. Such adhesives are those known in the art and may include aggressively tacky adhesives, pressure sensitive adhesives, repositionable or positionable adhesives, hot melt adhesives, and the like.

The adhesive layer 17 is preferably covered with a release liner (not shown) that provides protection to the adhesive until the image receptor medium is ready to be applied to a surface.

Prime layer 16 may also by itself serve as an adhesive layer in some applications. The prime layer preferably comprises an ethylene vinyl acetate resin containing from about 5 weight % to about 28 weight % vinyl acetate, and a filler such as talc to provide a degree of surface roughness to the prime layer. The filler helps prevent blocking and promotes adhesion of the adhesive. The filler is generally present in an amount in the range from about 2 % to about 12 % by weight, preferably about 4 % to about 10 % by weight, and more preferably about 8 % by weight. The layer may also contain other components such as pigments, fillers, ultraviolet stabilizing agents, antiblock agents, antistatic agents, and the like.

Optional Treated Image Reception Layer

Image receptivity can be improved by the application of a surface treatment to the exposed surface of the image reception layer 12. Nonlimiting examples of surface treatment include corona treatment and flame treatment. Preferably, if surface treatment is used, corona treatment is selected. As known to those skilled in the art, corona treatment comprises passing a film between two surfaces with a sufficiently high voltage applied between them to generate a plasma which is commonly called a corona. Further details can be found in many patents and publications including: Journal of Adhesion Science and Technology, Volume 3, page 321-335, 1989.

Optional Inkjet Layer

Figure 3 illustrates an image receptor medium having the same features as shown in Figure 2, with the addition of an optional inkjet layer 36 on the outer surface 13 of the image reception layer 12. The inkjet layer is preferably used when the image receptor medium will receive images from a thermal ink jet printer using water-based inkjet inks (either dye-based or pigment-

based) to provide characteristics of dye bleed resistance, low fading, uniform fading and rapid drying. In one embodiment, the inkjet layer comprises at least two layers 32 and 34. The uppermost layer 32, or top coat layer, functions as a protective penetrant layer to rapidly take up the water-based ink while the bottom coat layer 34 functions as an inkjet receptor. The bottom coat layer contains dispersed particles of a size such that the surface of the top coat layer exhibits protrusions or is roughened. The dispersed particles are preferably cornstarch or a modified cornstarch. The formulation of such inkjet layers is described in U.S. Pat. No. 5,747,148 (Warner et al.). Alternatively, the inkjet layer may comprise a single layer (not shown) such as described U.S. Patent Nos. 5,389,723 and 5,472,789.

This invention can include other layers in addition to the image reception layer 12, the substrate layer 14, the optional prime layer 16, the optional adhesive layer 17, and the optional inkjet layer 36. Additional layers may be useful for adding color, enhancing dimensional stability, promoting adhesion between dissimilar polymers in the above-described layers, and the like. After the image receptor medium has been printed with an image, an optional protective overlamine layer (not shown) may be adhered to the printed surface. The overlamine layer improves weather resistance of the film by helping to protect the film from ambient humidity, direct sunlight and other weathering effects, as well as protecting the image from nicks, scratches, and splashes. In addition, the overlamine layer can impart a desired finish to the image, such as high gloss or matte. Suitable overlamine layers include any suitable transparent plastic sheet material bearing an adhesive on one surface. Use of such overlamine layers is, for example, described in U.S. Patent No. 4,966,804.

Making the Image Receptor Medium

The image receptor medium of this invention can be made by a number of methods. For example, layers 12 and optional layers 14 and 16 can be coextruded using any suitable type of coextrusion die and any suitable method of film making such as blown film extrusion or cast film extrusion. Adhesive layer

17 may be coextruded with the other layers, transferred to the image receptor medium from a liner, or directly coated onto the image receptor medium in an additional process step. For the best performance in coextrusion, the polymeric materials for each layer are chosen to have similar properties such as melt
5 viscosity. Techniques of coextrusion are found in many polymer processing references, including Progelhof, R.C., and Throne, J.L., "Polymer Engineering Principles", Hanser/Gardner Publications, Inc., Cincinnati, OH, 1993. Alternatively, one or more of the layers may be extruded as a separate sheet and laminated together to form the image receptor medium. One or more of the layers
10 may also be formed by coating an aqueous or solvent-based dispersion onto one or more previously extruded layers. This method is less desirable because of the extra process steps and the additional waste involved.

The finished image receptor medium may be subjected to a surface treatment method such as corona treatment to improve the image receptivity of the
15 image receptor medium for certain applications.

Use of the Image Receptor Medium

The imaging materials that can be used in accordance with the present invention are particulate and semicrystalline or amorphous materials
20 comprising a film-forming or resinous binder that is generally a thermoplastic. The imaging materials also contain pigments or dyes to provide contrast or color to the deposited image. Inks and toners are examples of well known imaging materials. The imaging materials may be deposited by a variety of known techniques such as electrography, screen printing, knife or roll coating, rotogravure
25 coating, and the like.

An example of an imaging process using the image receptor medium of the present invention comprises first generating a toned image on an image transfer medium in an electrostatic printer using techniques and materials such as those described in U.S. Patent No. 5,262,259 and then transferring the
30 image to the image receiving surface of the image receptor medium. The image transfer can be accomplished in many ways known in the art such as passing the

5 sheets together through heated nip rolls in a method known as hot roll lamination, or placing the sheets together on a heated platen in a vacuum drawdown frame. Hot roll lamination is described in U.S. Patent No. 5,144,520. The imaged medium is then preferably covered with an overlamine layer. If the multilayered film includes an adhesive layer and a release liner, the release liner may be removed and the imaged medium affixed to a wall, vehicle side, banner, or other surface using techniques well known in the art.

10 In another example of an imaging process, the image receptor medium is screen printed directly, thereby receiving the desired image without the extra image transfer step. The techniques and materials for practicing screen printing are described in U.S. Patent No. 4,737,224. The imaged film is then used as described above. The image reception layer of the present invention is particularly suitable for screen printing because the image reception layer is extremely tolerant of the effects of UV light used to cure solventless inks used in screen printing. An example of such inks is disclosed in U.S. Pat. No. 5,462,768.

15 In another example of an imaging process, the image receptor medium is fed into an inkjet printer, printed directly with the desired image, and then overlaminated and applied as described above. The inkjet printer can print using either thermal inkjet inks or piezo inkjet inks. Thermal inkjet printers include those made by Hewlett Packard Corporation of Palo Alto, CA, USA. Piezo inkjet printers include those made by Idanit Technologies, Ltd. of Rishon Le Zion 75150 Israel.

25 In another example of an imaging process, the image receptor medium is printed directly with an image via a thermal mass transfer process, using a device such as a GERBER EDGE thermal transfer printer (Gerber Scientific Products, Inc., Manchester, CT, USA). The image film is then used as described above.

30 The invention is further illustrated by the following examples, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this invention.

Example 1.

Samples of image receptor media each comprising a substrate layer and an image reception layer according to this invention were made as follows:

For each of the samples with the exception of Example #13, film was produced using a cast film extrusion process. Resin pellets were fed into a 1.9 cm (3/4 in) single screw extruder manufactured by C.W. Brabender Instruments Inc., South Hackensack, NJ, 07606, with a temperature profile from 204 °C (400 ° F) to 232 °C (450 °F) resulting in a melt temperature of about 232 °C (450 °F). A horizontal die was used to cast the films onto a polyethylene terephthalate (PET) base film approximately 15 cm (6 in) wide and 0.05 mm (0.002 in) thick traveling at approximately 3 meters/min (10 ft/ min.). The resulting film construction was run between a steel chill roll and a rubber backup roll to solidify the molten resin into a layer having a thickness of approximately 0.1 mm (0.004 in). The samples were then run through a 20 cm (8 in) Enercon bare roll corona treater manufactured by Enercon Industries Corporation, Menomonee Falls, WI, with a power setting of 0.35 kilowatts, and wound to form a roll. Samples containing the hindered amine light stabilizer (HALS) were made by dry blending the resin listed in the example with the HALS concentrate pellet and feeding the blended mixture to the extruder.

Example 13 was a multilayered film produced using a conventional blown film coextrusion process. Each of three extruders A, B, and C supplied a melt formulation to an annular die where the melts were combined to form a single molten stream consisting of three distinct layers in a sleeve shape. For each sample, the melt of extruder A formed the image reception layer, the melt of extruder B formed the substrate layer, and the melt of extruder C formed the prime layer. The molten polymer sleeve was then blown to its final diameter and thickness by introducing air into the sleeve and trapping it between the die and nip rolls at the top of the blown film tower. The film sleeve was then slit into two flat film webs, each of which was corona treated on the image reception layer side and wound onto a core. The resulting samples each had a thickness of about 0.06 mm (0.0024 in), although layer thickness distribution varied. The HALS material used in all of the Examples indicated is Ampacet 10407 (Ampacet Corp.) which

consists of 90% by weight of a polyethylene carrier resin and 10% by weight of Chimasorb 944. (Poly[[6-[(1,1,3,3.-tetramethyl butyl) amino]-s-triazine-2,4-diyl]][[(2,2,6,6.-tetramethyl-4-piperidyl) imino] hexamethylene [(2,2,6,6.-tetramethyl-4-piperidyl) imino]]) produced by Ciba-Geigy Inc., Hawthorne, NY, 10532.

Layer Formulations

Image Reception Layer

Example	Material	Name
1	EMAc	EMAc 1305
	20% MA - block copolymer (Chevron Chemical Company, Houston, TX , 77253)	
2	EMAc	EMAc 1305 w/ 0.4% HALS
	20% MA - block copolymer (Chevron Chemical Co.)	
3	EMAc	EMAc 1205
	20% MA - random copolymer (Chevron Chemical Co.)	
4	EMAc	EMAc 1205 w/ 0.4% HALS
	20% MA - random copolymer (Chevron Chemical Co.)	
5	EMAc	EMAc 2260
	24% MA - random copolymer (Chevron Chemical Co.)	
6	EMAc	EMAc 2260 w/ 0.4% HALS
	24% MA - random copolymer (Chevron Chemical Co.)	
7	EMAc	EMAc 2212T
	12% MA - random copolymer (Chevron Chemical Co.)	
8	EMAc	EMAc 2212T w/ 0.4% HALS
	12% MA - random copolymer (Chevron Chemical Co.)	
9	EEA	EEA- DPDA-6182
	15% EA - random copolymer (Union Carbide Corp., Danbury, CT)	
10	EEA	EEA- DPDA-6182
	w/ 0.4% HALS	
	15% EA - random copolymer (Union Carbide Corp.)	
11	EEA	EEA- DPDA-6169
	18% EA - random copolymer (Union Carbide Corp.)	
12	EEA	EEA- DPDA-6169

Example	Material	Name
		w/ 0.4% HALS
	18% EA - random copolymer (Union Carbide Corp.)	
A	Cast vinyl	3M ScotchCal™ 180-10
B	EVA	ELVAX 3135 B
	12% VA resin (DuPont Polymers, Wilmington, DE)	
C	EVA	ELVAX 3135 B w/ 0.4% HALS
	12% VA (DuPont Polymers)	

Example 13

5 Image reception layer (15% of total thickness)

1000 parts Chevron SP1305 ethylene methyl acrylate resin (Chevron
Chemical Co.

50 parts Ampacet 10407 UV inhibitor concentrate (Ampacet Corp.,
Tarrytown, NJ)

10 50 parts POLYFIL MT5000 talc concentrate (Polyfil Corp., Dover, NJ)

Substrate layer (65% of total thickness)

1000 parts Fina Z9470 Polypropylene-ethylene copolymer (Fina Oil and
Chemical Company, Deer Park, TX)

15 50 parts Ampacet 10407 UV inhibitor concentrate (Ampacet Corp.,
Tarrytown, NJ)

Adhesive Prime layer (20% of total thickness)

1000 parts Elvax 3135B ethylene vinyl acetate resin (DuPont Polymers)

20 200 parts Polyfil MT 5000 talc concentrate (Polyfil Corp.)

50 parts Ampacet 10407

All of the samples were tested for ink adhesion using 3M
SCOTCHCAL™ 9705 UV curing ink using a 390 mesh screen. Film samples

were taped to a 30 cm x 30 cm (12 in x 12 in) piece of 3M Scotchcal™ 180-10 vinyl film (Minnesota Mining and Manufacturing Company of St. Paul, MN, USA) for printing. This step was required to make the film samples easier to handle on the screenprint press. The printed samples were cured in a focus cure unit using a UV dosage of 162 millijoules per square centimeter (mJ/cm²) as measured in the UVA spectral region by a UVICURE PLUS radiometer manufactured by EIT, Inc., Sterling, VA. All of the printed samples were then evaluated using a crosshatch adhesion test as follows. Each sample was scribed with ten parallel lines spaced about 1.6 mm (1/16 in) apart using the corner of a sharp razor blade. The scribed lines cut through the ink layer only and not the base film. Another set of similar lines was scribed through the ink at right angles to the first set resulting in a crosshatch pattern. A 2.5 cm x 10.2 cm (1 in x 4 in) piece of 3M SCOTCH™ tape No. 610 was then applied over the crosshatch pattern and wiped with two firm application strokes using a 3M PA-1 applicator squeegee. The tape was pulled off using a sharp jerk and the crosshatched sample was observed for ink removal. The samples were rated on a scale from 0-5 with 0 being "excellent" according to visual standards and 5 being "poor". Results are shown in the table below.

Example	Material	Name	Ink adhesion				
			9705 UV ink cured @ 0.162 J/cm ² , after # Passes Indicated.				
			<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>
1	EMAc	EMAc 1305	0	0	0	1.5	4
		20% MA - block copolymer (Chevron Chemical Co.)					
2	EMAc	EMAc 1305 w/ 0.4% HALS	0	0	0	1.5	2
		20% MA - block copolymer (Chevron Chemical Co.)					
3	EMAc	EMAc 1205	0	0	0	3.5	5
		20% MA - random copolymer (Chevron Chemical Co.)					
4	EMAc	EMAc 1205 w/ 0.4% HALS	0	0	0	1	0.5
		20% MA - random copolymer (Chevron Chemical Co.)					
5	EMAc	EMAc 2260	0	0.5	3	5	5
		24% MA - random copolymer (Chevron Chemical Co.)					
6	EMAc	EMAc 2260 w/ 0.4% HALS	0	0	0	0	5
		24% MA - random copolymer					

Example	Material	Name	Ink adhesion				
			9705 UV ink cured @ 0.162 J/cm ² , after # Passes Indicated.				
			<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>
		(Chevron Chemical Co.)					
7	EMAc	EMAc 2212T	0	0	5	5	5
		12% MA - random copolymer (Chevron Chemical Co.)					
8	EMAc	EMAc 2212T w/ 0.4% HALS	0	0	2	2	5
		12% MA - random copolymer (Chevron Chemical Co.)					
9	EEA	EEA- DPDA-6182	0	0	5	5	5
		15% EA - random copolymer (Chevron Chemical Co.)					
10	EEA	EEA- DPDA-6182	0	0	2	2	5
		w/ 0.4% HALS					
		15% EA - random copolymer (Chevron Chemical Co.)					
11	EEA	EEA- DPDA-6169	0	0	1	4.5	5
		18% EA - random copolymer (Union Carbide Corp.)					
12	EEA	EEA- DPDA-6169	0	0	4	0.5	5
		w/ 0.4% HALS					
		18% EA - random copolymer (Union Carbide Corp.)					
13	EMAc	EMAc Blend	0	0	0	0	0
A	Cast vinyl	Scotchcal 180-10	0	0	0.5	5	5
B	EVA	ELVAX 3135 B	5	5	5	5	5
		12% VA (DuPont Polymers)					
C	EVA	ELVAX 3135 B w/ 0.4% HALS	5	5	5	5	5
		12% VA (DuPont Polymers)					

All of the Examples 1-13 had consistently excellent ink adhesion after 5 passes. A number of the Examples approached 20 passes. Example 13 made using a blown film process scored perfectly through 20 passes. By comparison, Comparative Examples B-C showed difficulties after 5 passes indicating that the combination of an ethylene and a more polar monomer alone do not increase adhesion of UV inks. Comparative Example A is a plasticized vinyl film that is desired to be replaced as indicated above. The odd numbered Examples, with the exception of Example #13, did not perform as well as the even numbered Examples which contained the optional but preferred HALS compound

serving as a free-radical scavenger. Example 13 illustrates the performance of a formulation for a multilayered film that would be useful for a graphic film application. More specifically, Example #13 illustrates the performance of the ethylene alkyl acrylate materials and HALS in combination with diluents such as
5 pigments and carrier resins commonly used to deliver concentrated additives for film production.

The invention is not limited to the above embodiments. The claims follow.

What is claimed is:

1. An image receptor medium comprising an image reception layer
5 having two major opposing surfaces, wherein the image reception layer comprises a polymer comprising at least two monoethylenically unsaturated monomeric units, wherein one monomeric unit comprises a substituted alkene where each branch comprises from 1 to about 8 carbon atoms and wherein one other monomeric unit
10 comprises a (meth)acrylic acid ester of a nontertiary alkyl alcohol in which the alkyl group contains from 1 to about 12 carbon atoms and can include heteroatoms in the alkyl chain and in which the alcohol can be linear, branched, or cyclic in nature..
2. The image receptor medium of claim 1, further comprising a prime layer
15 on a first major surface of the image reception layer, wherein the second major surface is a surface for receiving images.
3. The image receptor medium of Claim 1 or Claim 2, further comprising a substrate layer comprising a polymer and having two opposing major surfaces
20 wherein the image reception layer is on a first major surface of the substrate layer having an outer surface for receiving images, said image reception layer further comprises an efficacious amount of a free-radical scavenger.
4. The image receptor medium of claim 3, further comprising an adhesive
25 layer on the outer surface of the prime layer.
5. The image receptor medium of claim 3, wherein the first monomeric unit is selected from the group of ethylene, propylene, butene, isobutylene, hexene, and octene; and wherein the second monomeric unit is selected from the group
30 consisting of methyl(meth)acrylate, ethyl(meth)acrylate, butyl(meth)acrylate, 2-ethylhexyl acrylate, ethoxyethyl acrylate, hexyl acrylate, and the like; and

wherein the polymer of the substrate layer is selected from the group consisting of polyolefin, polyester, polyamide, acrylic, polystyrene, polyurethane, polycarbonate, and polyvinyl chloride.

5 6. The image receptor medium of any of claims 3-5, wherein the medium is a coextruded multilayered film.

7. The image receptor medium of Claim 6, wherein the free-radical scavenger comprises a hindered amine light stabilizer present in an amount from
10 about 0.2 to about 0.8 weight percent of the total image reception layer.

8. The image receptor medium of Claim 6, wherein an exposed surface of the image reception layer is surface treated; and
 wherein the polymer is selected from the group consisting of ethylene
15 methyl acrylate and ethylene ethyl acrylate.

9. A method of providing an image on an image receptor medium, comprising screen printing the image on the image receptor medium of any of claims 1-8.
20

10. A method of providing an image on an image receptor medium, comprising printing the image on the image receptor medium of any of claims 1-8, wherein the printing step comprises at least 5 exposures of the medium to ultra-violet light without significant loss of ink adhesion properties in the medium.
25

1/1

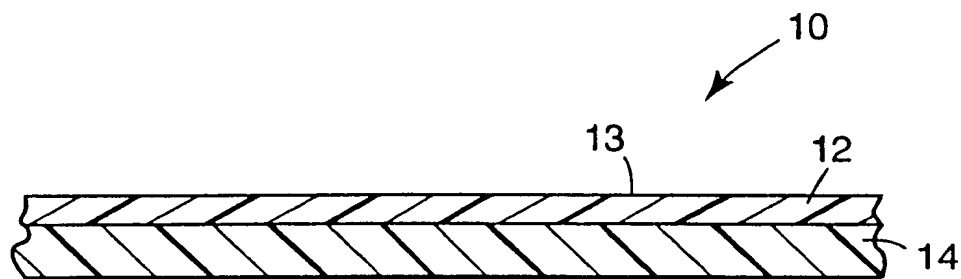


Fig. 1

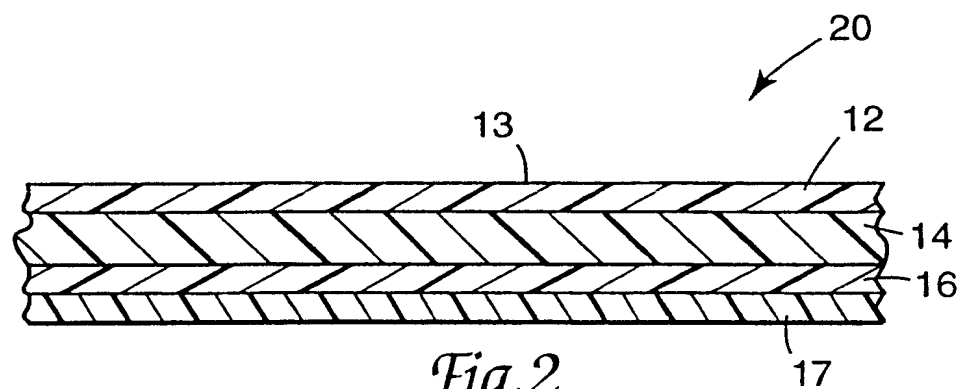


Fig. 2

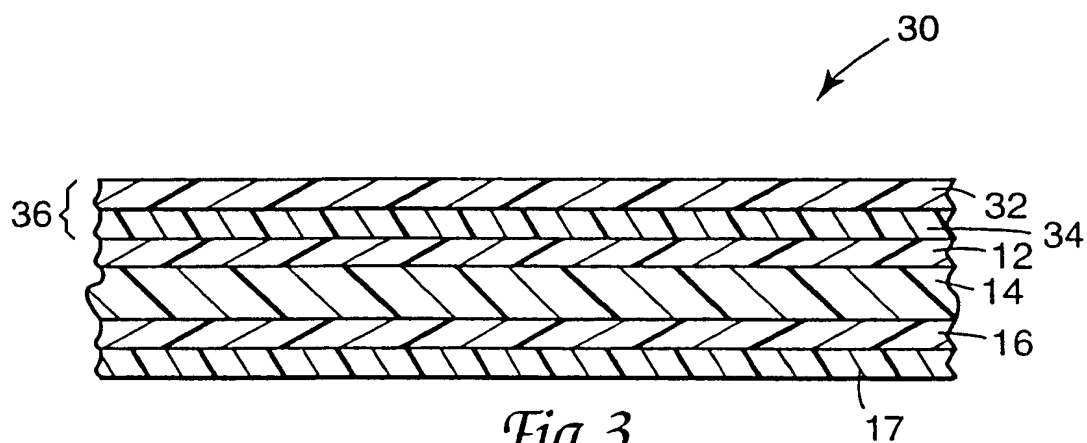


Fig. 3

INTERNATIONAL SEARCH REPORT

Int. l. Application No.

PCT/US 99/03424

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B41M5/00 G03G7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B41M G03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 04960 A (MINNESOTA MINING AND MANUFACTURING COMPANY) 5 February 1998 see page 3, line 17 - line 27 see page 8, line 1 - page 9, line 28 see page 10, line 31 - page 12, line 21 see claims 1,3,6,7; examples 2G,2H ---	1-9
X	EP 0 767 070 A (DAI NIPPON PRINTING COMPANY LIMITED) 9 April 1997 see page 3, line 50 - page 4, line 11 see page 4, line 24 - line 52 see page 5, line 56 - page 6, line 3 see claim 1 ---	1-6,9
X	EP 0 730 061 A (BASF AKTIENGESellschaft) 4 September 1996 see claim 1; examples 1,3 --- -/--	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 May 1999

Date of mailing of the international search report

01/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx: 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bacon, A

INTERNATIONAL SEARCH REPORT

Int. onal Application No

PCT/US 99/03424

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	EP 0 683 057 A (FELIX SCHOELLER JR. FOTO- UND SPEZIALPAPIERE GMBH & CO. KG.) 22 November 1995 see claims 1,4; example 1 see page 2, line 34 - page 3, line 30 ---	1
X	EP 0 466 503 A (D.D.KALRO) 15 January 1992 see example 2 see page 3, line 10 - line 13 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int lional Application No

PCT/US 99/03424

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9804960	A	05-02-1998	AU 1083697 A EP 0914630 A	20-02-1998 12-05-1999
EP 767070	A	09-04-1997	JP 9076643 A DE 69601059 D US 5834397 A	25-03-1997 14-01-1999 10-11-1998
EP 730061	A	04-09-1996	DE 4315881 A AU 672685 B AU 6197594 A CN 1098111 A EP 0624607 A JP 6329734 A	17-11-1994 10-10-1996 17-11-1994 01-02-1995 17-11-1994 29-11-1994
EP 683057	A	22-11-1995	DE 4417520 C AT 162471 T DE 59501310 D ES 2111986 T GR 3026142 T US 5614345 A	07-12-1995 15-02-1998 26-02-1998 16-03-1998 29-05-1998 25-03-1997
EP 466503	A	15-01-1992	GB 2236984 A,B	24-04-1991

